


**5**  
JAAR  
GARANTIE



Airconditioning  
voor **ieder seizoen**




Standaard  
Wi-Fi



Energieklasse



Volg mij




Ultra Stille  
Modus



Ionisator

# Passion Eco

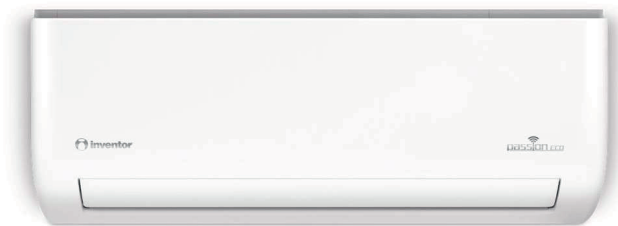

Model		P9VI32-09WF/ P9VO32-09	P9VI32-12WF/ P9VO32-12	P9VI32-18WF/ P9VO32-18	P9VI32-24WF/ P9VO32-24	
Koel capaciteit min/max (kWatt) Nom.		2.63 (1.20-3.43)	3.51(1.40-4.57)	5.27 (1.96-6.21)	7.32 (3.04-8.44)	
Verwarming capaciteit min/max (kWatt) Nom.		2.93 (0.82-3.87)	4.10 (0.87-5.12)	5.56 (1.28-6.97)	7.62 (2.08-9.44)	
Seasonal Efficiency (i.om. EN14825)	Koeling	Capaciteit nom (kW)	2.6	3.5	5.3	7.2
		Energie Label	A++	A++	A++	A++
		SEER	6.8	6.3	6.7	6.4
		Jaarlijks verbruik (kWh/jaar)	134	194	277	394
	Verwarming (Gemiddeld Klimaat)	Capaciteit nom (kW)	2.1	2.5	4.0	5.5
		Energie Label	A+	A+	A+	A+
		SCOP	4.0	4.0	4.0	4.0
		Jaarlijks verbruik (kWh/jaar)	735	875	1.400	1.925
	(Warm Klimaat)	Capaciteit nom (kW)	3.0	3.2	4.5	7.0
		Energie Label	A+++	A+++	A+++	A+++
		SCOP	5.1	5.2	5.1	5.1
		Jaarlijks verbruik (kWh/jaar)	824	862	1.235	1.922
Voltage / Frequentie / Fase (V/Hz/Ph)		220-240/50/1	220-240/50/1	220-240/50/1	220-240/50/1	
Opgenomen Stroom (A)	Koelen	3.3 (0.4-6.0)	5.4 (0.5-7.6)	6.5 (0.7-9.7)	9.8 (1.0-13.1)	
	Verwarmen	3.5 (0.6-6.3)	5.1 (0.7-8.0)	6.0 (1.0-10.1)	9.2 (1.4-13.7)	
Opgenomen Vermogen nom. min/max (W)	Koelen	737 (100-1.312)	1.250 (110-1.740)	1.500 (150-2.220)	2.260 (230-3.010)	
	Verwarmen	811 (140-1.380)	1.170 (150-1.830)	1.390 (220-2.330)	2.110 (330-3.150)	
Luchtdebiet (Hoog/Med/Laag) (m³/u)		486/433/329	550/490/360	810/720/550	1.050/970/650	
Geluidsniveau	Binnenunit (Stil/laag/medium/hoog)	20/29/35/41	23/30/37/41	24/33/41/45	27/35/44/46	
	Buitenunit	55.5	55	57	59	
Geluidsvermogen [dB(A)]	Binnenunit	52	54	57	59	
	Buitenunit	61	61	62	65	
Compressor Type		ROTARY	ROTARY	ROTARY	ROTARY	
Leiding Diameters		1/4"   3/8"	1/4"   3/8"	1/4"   1/2"	3/8"   5/8"	
Electrische Voeding   Buitendeel Kabel & Afzekering		3x1.5/10	3x1.5/10	3x2.5/16	3x2.5/16	
Electrische Voeding   Binnendeel en Communicatie		5x1.5	5x1.5	5x1.5	5x1.5	
Afmetingen (Br x Di x Ho) (mm)	Binnenunit	717x193x302	805x193x302	964x222x325	1.106x232x342	
	Buitenunit	770x300x555	770x300x555	800x333x554	845x363x702	
Net Gewicht (kg)	Binnen- Buitendeel	7.5/26.4	8.2/26.5	10.8/37.0	14.3/50.0	
Koudemiddelvulling (g)		R32/0.7	R32/0.8	R32/1.25	R32/1.6	
Buiten Temperatuur Werkingsgebied (°C)	Koelen	-15-50	-15-50	-15-50	-15-50	
	Verwarmen	-15-30	-15-30	-15-30	-15-30	

\* Units zijn vorgevuld tot 5 meter. Per extra meter 12 gr. bijvullen. Let op! Bij het 7 kW model is dit 24 gr. per extra meter.

